



Valvoline[™]

SINCE 1866



LIGHT DUTY PRODUCT CATALOG

TABLE OF CONTENTS

INTRODUCTION	03
ABOUT VALVOLINE	04
VALVOLINE PRODUCTS	06
PRODUCT OVERVIEW	46



INTRODUCTION

Valvoline is one of the world's first and most enduring lubricant brands. This fact alone makes Valvoline special. But it also reflects the values we uphold, and the proof of value we deliver. The world has changed considerably since Dr John Ellis introduced Valvoline in 1866. Valvoline not only evolved, but launched many groundbreaking innovations that changed the industry. Today, professional and consumer markets continue to trust Valvoline because we offer a better formula for businesses and consumers through innovative products, services and tools.



ABOUT VALVOLINE

OUR VALUES, VOW & VISION

Middle of the road is simply not good enough. As a specialized maintenance company, we develop premium products. But we also have to be extraordinary beyond products.

OUR VALUES

- It all starts with our people
- Safety is always our priority
- We are committed to winning... the right way
- We work hard, celebrate success and have fun
- We strive for greatness

OUR VOW

Our vow is to bring “Hands-On Expertise” for the benefit of our customers every day, moving the business forward with speed and excellence.

OUR VISION

We are building the world’s leading engine and automotive maintenance business. We will accelerate growth around the world by increasing our focus and investment in:

- The Valvoline brand, built on superior products and service
- Technology that enables speed, innovation and increased efficiency in every aspect of our business
- Strong value-adding relationships with our channel partners

VALVOLINE SOUTH AFRICAN HISTORY

- Valvoline has been present in South Africa since the late 1990s.
- Valvoline was an affiliate until FY 2012, providing Sales & Customer Service to the country.
- Valvoline changed over to an importer model from FY 2013, with Cummins and a third party partner being primary distributors in South Africa.
- Valvoline in FY 2017, further enhanced the distribution model and aligned with key strategic B2B and B2C partners in South Africa.

PERFORMANCE GUARANTEE

Performance is the only proof of product quality. With the Valvoline Performance Guarantee, Valvoline assures that its products will perform.

1 Valvoline warrants that products will meet the applicable specifications provided by Valvoline for each of our products. The wide range of Valvoline products feature individual formulations that meet and, in some cases, exceed the latest industry and vehicle OEM specifications.

3 Valvoline products are proven to provide added performance, longer life, and better protection for your equipment.

2 Valvoline uses only the highest quality base oils and the most technologically advanced additive systems to provide our customers with lubricants of unsurpassed quality.

4 Furthermore, Valvoline tests each batch of oil during the blending process. On-site quality assurance coordinators make certain that product specifications are maintained without exception.



LIGHT DUTY PRODUCTS



LUBRICANTS

09



ENGINE OIL

09

Synpower	10
All-Climate	12
All-Fleet	16
Champ 4T (Four-stroke oil)	18



TRANSMISSION FLUID

20

ATF	22
Heavy Duty Gear Oil	24



MULTI-PURPOSE GREASE / LUBRICANT SPRAY

26

Lithium EP 2	28
Multi Spray	30



CHEMICALS

32



COOLANTS / ANTIFREEZE

32

MaxLife Coolant	34
-----------------	----



BRAKE & CLUTCH FLUID

36

Brake & Clutch Fluid	38
----------------------	----



SOLVENTS

40

Brake Cleaner	42
Carburetor Cleaner	44



ENGINE OIL

SYNPOWER

- Optimal protection
- Engine cleanliness
- Excellent cold start
- Fuel Economy benefits
- Long drain interval

ALL-CLIMATE

- Broad coverage
- Wear protection
- Engine cleanliness
- Cold start performance

ALL-FLEET

- Mineral or synthetic technology
- Excellent engine protection
- For mixed applications
- Approved by most major OEM's

CHAMP 4T

- Specially formulated for use in four-stroke motorcycle engines, under all riding conditions
- Enhanced formulation for maximum engine protection and performance output
- Exceeding requirements of leading engine manufacturers

SYNPOWER



OEM APPROVED PREMIUM GRADE ENGINE OIL

SynPower is the result of Valvoline's drive for innovation. SynPower is an OEM approved premium grade engine oil that provides superior performance and is formulated to fulfill the latest standards of leading engine manufacturers. It is designed to reduce fuel consumption, lower emissions and extended maintenance intervals. Through the use of advanced additives, SynPower keeps the engine clean from harmful sludge and deposits and provides ultimate engine protection. Excellent product stability ensures long-lasting performance under all operating conditions.



SYNPOWER FE 5W-30

- Premium quality full synthetic engine oil
- For passenger cars with a petrol, diesel or LPG engine
- Offers maximum Fuel Economy benefits
- Suitable for engines running on Biofuel mixtures (for example E85)
- Suitable for in-warranty service fill of Ford engines which require specifications mentioned below

PERFORMANCE LEVELS

ACEA A1/B1, A5/B5, API SL/CF, Jaguar Land Rover STJLR.03.5003, Renault RN0700, Ford WSSM2C913-D. Suitable for use where Ford WSS-M2C913-A, B, C are specified. Recommended for use where Fiat 9.55535.G1 is specified. For diesel engines (Except Ford KA TDCi 2009 and Galaxy 1.9 TDi 2000-2006)

SYNPOWER 5W-40

- Premium quality full synthetic engine oil
- For passenger cars with a petrol, diesel or LPG engine
- Compatible with turbochargers and catalytic converters
- Suitable for extra long drain oil change intervals.

PERFORMANCE LEVELS

ACEA A3/B3, A3/B4, API SL, SM, SN/CF, GM LL-B-025. MB-229.3, 226.5, PSA B71 2296. Recommended for use where Fiat 9.55535.H2, M2, N2 or Z2 is specified.

APPROVALS

BMW LL-01, MB-Approval 229.5, Porsche A-40, Renault RN 0700, RN 0710, VW Standard 502.00, 505.00

Product Description	1L	5L	20L	208L
SynPower FE 5W-30	-	872552	-	-
SynPower 5W-40	872380	872382	-	-

*Please refer to contact details on the back page for more information.

ALL-CLIMATE



HIGH QUALITY ALL-ROUND ENGINE OIL

Valvoline All-Climate was one of the first multi-grade engine oils on the market and has been a benchmark for quality ever since. All-Climate engine oils are available for a wide range of passenger cars with petrol, diesel or LPG engines. All-Climate engine oils are formulated to keep engines clean and provide year-round protection. Proven and trusted technology is used to guarantee easy cold starts and optimal lubrication over a wide variety of operating temperatures.



ALL-CLIMATE 15W-40

- High-quality conventional engine oil. Formulated for year round performance
- Suitable for turbo and nonturbocharged diesel, petrol and LPG engines. For use in passenger cars and light trucks

ALL-CLIMATE SL 20W-50

- High-quality conventional engine oil. Formulated for year round performance
- Suitable for turbo and non-turbocharged diesel, petrol and LPG engines. Can be used in passenger cars, light trucks, small marine engines and motorcycles without wet clutch

ALL-CLIMATE SG 20W-50

- High-quality conventional engine oil. Formulated for year round performance in petrol and LPG engines

PERFORMANCE LEVELS

ACEA A3/B3, API SL/CF, MB 229.1, VW Standard 505.00/501.01. Recommended for use where Fiat 9.55535.D2 is specified.

PERFORMANCE LEVELS

ACEA A3/B3, API SL/CF, MB 229.1, VW Standard 505.00/501.01.

PERFORMANCE LEVELS

API SG

Product Description	1L	4L	5L	20L	208L
All-Climate 15W-40	-	-	882948	-	-
All-Climate SL 20W-50	882955	-	882953	-	821257
All-Climate SG 20W-50	-	882445	-	-	-
All-Climate 5W-30	881980	-	881981	-	872285
All-Climate 5W-40	881983	-	881984	-	872289
All-Climate Extra 10W-40	-	-	882949	-	834147
All-Climate 10W-40	-	-	882949	-	-
All-Climate Diesel C3 5W-40	-	-	872277	-	-
All-Climate High-Mileage	884834	-	883582	-	-

*Please refer to contact details on the back page for more information.



ALL-CLIMATE 5W-30

- High-quality full synthetic engine oil. Formulated for year round performance
- For petrol, diesel and LPG engines of passenger cars, delivery vans, persons minibuses, campers
- Suitable for modern engines with turbochargers, catalytic converters and long drain intervals

PERFORMANCE LEVELS

ACEA A3/B3, A3/B4. MB 229.3 API: SL/CF, GM-LL-A-025, GM LL-B-025, VW Standard 502.00/505.00. Recommended for use where Fiat 9.55535.G1 is specified.



ALL-CLIMATE 5W-40

- High-quality full synthetic engine oil. Formulated for year round performance
- For petrol, diesel and LPG engines of passenger cars, delivery vans, persons minibuses, campers
- Suitable for modern engines with turbochargers, catalytic converters and long drain intervals

PERFORMANCE LEVELS

ACEA A3/B3, A3/B4. API SN/CF, MB 229.3, Renault RN0700/RN0710, VW Standard 502.00/505.00



ALL-CLIMATE EXTRA 10W-40

- High-quality engine oil. Formulated with the use of synthetic technology for year round performance
- For turbo and nonturbocharged diesel, petrol and LPG engines. Can be used in passenger cars, light trucks, stationary engines

PERFORMANCE LEVELS

ACEA A3/B4, API SM, SN/CF, MB 229.1, Renault RN0700, VW Standard 505.00/501.01. Recommended for use where Fiat 9.55535.D2 and G2 is specified.

Product Description	1L	4L	5L	20L	208L
All-Climate 15W-40	-	-	882948	-	-
All-Climate SL 20W-50	882955	-	882953	-	821257
All-Climate SG 20W-50	-	882445	-	-	-
All-Climate 5W-30	881980	-	881981	-	872285
All-Climate 5W-40	881983	-	881984	-	872289
All-Climate Extra 10W-40	-	-	882949	-	834147
All-Climate 10W-40	-	-	882949	-	-
All-Climate Diesel C3 5W-40	-	-	872277	-	-
All-Climate High-Mileage	884834	-	883582	-	-

*Please refer to contact details on the back page for more information.



ALL-CLIMATE 10W-40

- High-quality conventional engine oil. Formulated for year round performance. Proven and trusted technology for a broad range of diesel, petrol and LPG engines
- For passenger cars, light trucks and 4WD vehicles running on diesel, petrol or LPG fuels where in ACEA A3/B4 motor oils or API SL/CF SAE 10W-40 is recommended

PERFORMANCE LEVELS

ACEA A3/B4, API SL/F, MB 229.1, VW Standard 505.00/501.01. Recommended for use where Fiat 9.55535.D2 and G2 is specified.



ALL-CLIMATE DIESEL C3 5W-40

- Suitable for a wide range of engines. Especially suitable for turbo charged diesel engines of passenger cars and light trucks
- Recommended for Volkswagen Unit Injector diesel engines (< 2000, Pumpe Düse Motoren). But also suitable for modern engines with Diesel Particle Filter(DPF) or Three Way Catalytic systems TWC.

PERFORMANCE LEVELS

ACEA C3 API: SM, SN/CF BMW, LL-04 MB-226.5, 229.31 Ford WSS-M2C917-A GM Dexos 2 Porsche A40 Renault RN0700/0710 VW 50500 / 50501



ALL-CLIMATE 25W-60 HIGH-MILEAGE

- Formulated for turbo and non-turbocharged diesel, petrol and LPG engines.
- For use in passenger cars and light trucks.
- Also suitable for industrial equipment such as telehandlers or forklifts.

PERFORMANCE LEVELS

API: SL / CF

ALL-FLEET



EXTRA DURABILITY FOR LONG-DRAIN PERFORMANCE

Developed for a wide range of heavy-duty engines, All-Fleet engine oils combat the higher levels of contamination and soot created in extended-and long-drain operation to maintain advanced levels of engine protection and cleanliness.

The All-Fleet range of super high-performance diesel (SHPD) engine oils meets required OEM specifications, and helps fleet owners optimize engine life-cycle cost and performance.



ALL-FLEET 40

- Suitable for diesel engines in light trucks, heavy trucks, buses, earth moving machines etc.
- Can be used for truck fleets and for mixed fleet operations and also for industrial engines.
- Specially engineered for use in service fleets where it helps prevent the formation of sludge caused by frequent stop-and-go driving.

ALL-FLEET PLUS CH-4 15W-40

- Premium quality base oils and a high-tech additive package helps maximize engine durability.
- Advanced chemistry reduces friction and engine component wear.
- Unique formulation prevents deposit formation and protects against soot build-up.

ALL-FLEET EXTRA 15W-40

- ACEA E7 heavy-duty engine oil developed for maximized engine durability.
- Fulfills the requirements of Euro 3 and 4 trucks and offroad engines without DPF, allowing for full SAPS engine oil.
- Compatible with EGR and SCR systems.

PERFORMANCE LEVELS / APPROVALS

API: CF / SJ

PERFORMANCE LEVELS / APPROVALS

ACEA: E7-12, E5-02, E3-96#4, API CH-4/SJ, MAN M 3275, MB-228.3, MTU type 2, Volvo VDS-3, Renault RLD/RLD-2, Cummins CES 20076/77, Mack EO-N, EO-M Plus, Detroit Diesel 93K215, Caterpillar ECF-1-a.

PERFORMANCE LEVELS / APPROVALS

ACEA E7, API CI-4, CH-4, CG-4, Cummins CES 20076/77/78, Deutz DQC III-10, MAN M 3275-1, MB-228.3, MTU Type 2, Volvo VDS-3, Renault RLD/RLD-2, Mack EO-N, EO-M Plus, Caterpillar ECF-2, ECF-1-a, Global DHD-1.

Product Description	1L	5L	20L	208L
All-Fleet 40	-	882435	-	-
All-Fleet Extra 15W-40	-	854743	-	-
All-Fleet Plus CH-4 15W-40	-	882181	-	-

*Please refer to contact details on the back page for more information.

MOTORCYCLE OIL



ADDED PERFORMANCE FOR HIGH-POWERED ENGINES

For excellent protection in the severest conditions, Valvoline four-stroke (4T) motorcycle oils are formulated with specially selected base oils and additives to address the specific needs of a broad range of motorcycle engines. All Valvoline engine oils are developed for optimal protection across a wide temperature range, easy cold starts and wet-clutch compatibility.

BENEFITS FOUR-STROKE MOTORCYCLE OILS

- Specially formulated for use in four-stroke motorcycle engines
- Enhanced formulation for maximum engine protection and performance output
- Exceeding requirements of leading engine manufacturers
- Optimized for wet-clutch
- User-friendly packaging. Special pour-spout bottle cap ensures easy and spilling free application



CHAMP 4T 20W-50

- Recommended for all motorcycles under all riding conditions
- High acceleration & pick up
- Clean engine

PERFORMANCE LEVELS / APPROVALS


API SJ, JASO MA

Product Description	1L	5L	20L	208L
Champ 4T 20W-50	882446	-	-	-

*Please refer to contact details on the back page for more information.

TRANSMISSION FLUIDS



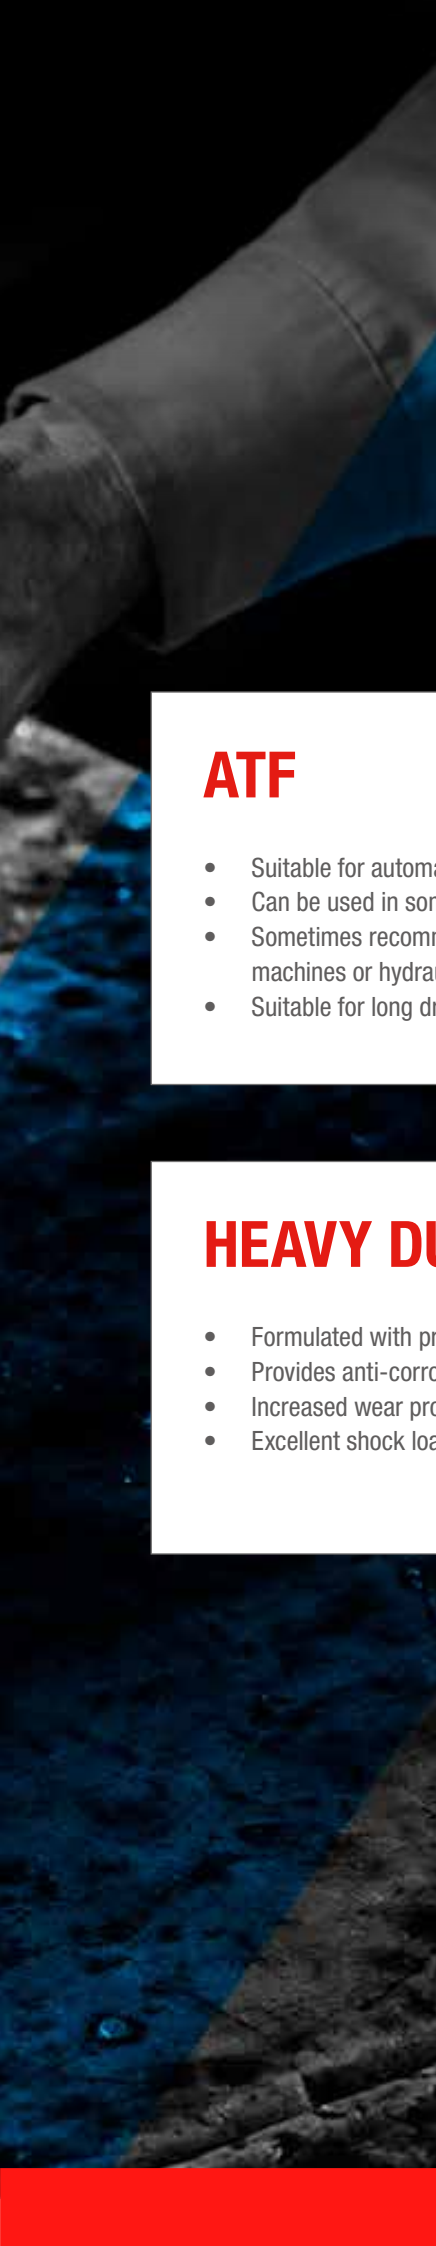

ATF

- Suitable for automatic gearboxes of passenger cars, vans, and other vehicles
- Can be used in some hand shifted transmissions
- Sometimes recommended as power steering fluid, hydraulic oil in earth moving machines or hydraulic lifting equipment
- Suitable for long drain intervals

HEAVY DUTY GEAR OIL

- Formulated with premium quality mineral oils
- Provides anti-corrosion and anti-wear protection
- Increased wear protection over wide temperature ranges
- Excellent shock load resistance

ATF





ATF

- Suitable for automatic gearboxes of passenger cars, vans, and other vehicles where the manufacturer recommends the specifications as referred to in this sheet.
- Can be used in some hand shifted transmissions. Sometimes recommended as power steering fluid. Suitable for long drain intervals.

PERFORMANCE LEVELS

GM Dexron® IID, IIE, III, IIH, VI, 9986195, Autotrak II, Subaru ATF, ATF-HP, Ford Mercon®, Mercon®V, SP, LV, FNR 5, XT-9-AMMF5, Toyota / Lexus Type T, T-III, T-IV, WS (except hybrid vehicles), BMW LT 71141, LA 2634, M-1375.4, 6 ETL-7045E, ETL-8072B, Volvo 1161521**, 1161540**, STD 1273.41
ATF 3.0, VW / Audi G-055-025-A2, G-055-005-A2, G-052-162-A1/A2, Chrysler Diamond SP-III, NAG-1, 3403-M115
VW / Audi G-055-162-A6, G-052-990-A2, G-060-162-A2
Chrysler ATF +3, VW TL 52162, LT 71141, Honda / Acura ATF-Z1 (not CVT), ATF-DW1 (not CVT), ZF ATF M 1375.4, 6
Mitsubishi Diamond SP-II, SP-III, ATF-J3, Dia Queen ATF-PA
ZF Lifeguardfluid 6, Hyundai SP-II, III, IV, SPH-IV, SP4-M, SP-14-RR, ZF Lifeguardfluid 8 (ZF No. S671 090 312), KIA
SP-II, III, IV, Audi/VW Oil no. G 060162 A1/A2/A6ATF, KIA
Red-1, BMW Oil No. 8322 2152426, Mazda CX-9, M-V *, FZ,
Jaguar Oil No. 02JDE 26444, Mercedes-Benz 236.1, 2, 3, 5, 6, 7, 8, 9, 10, 11, 12, 14, 15, Landrover Oil No. LR023288,
Mercedes-Benz NAG-1, NAG-2, 3403-M115, Chrysler Oil No. 68157995AA, Mini Cooper Mopar AS68RC ATF, Aisin Warner
Transmissions JWS-3309, JWS-3324, Nissan / Infiniti S, D, J, K, W-Matic, Jatco Transmissions N 402, JASO 1A



ATF DEX/MERC

- Suitable for automatic gearboxes of passenger cars and vans where the manufacturer recommends an ATF GM Dexron III or Ford Mercon.
- Can be used in some hand-shifted transmissions.
- Sometimes recommended as hydraulic oil in earth moving machines or hydraulic lifting equipment.
- Sometimes recommended as power steering fluid.

PERFORMANCE LEVELS

GM Dexron III, Ford Mercon, Allison C-4, Volvo 97325, 97335, 97340, ZF TE-ML 05L, 09, 11A, 11B

Product Description	1L	5L	20L	60L	208L
ATF	866885	-	866886	-	866888
ATF DEX/MERC	866913	-	-	-	866911

*Please refer to contact details on the back page for more information.

HEAVY DUTY GEAR OIL



HEAVY DUTY GEAR OIL

Heavy Duty Gear Oil is a superior sulfur-phosphorus, extreme pressure gear lubricant formulated with premium quality base stock to meet the demands of HD axle performance. It is designed to provide excellent load carrying capacity, extreme pressure properties, anti-foam performance, demulsibility, corrosion protection and thermal stability. This product is recommended for conventional rear axles and transmissions requiring EP gear lubes under high speed, high load, high torque, and high horsepower conditions.

Heavy Duty Gear Oil is designed for use in hypoid, helical, spiral bevel, bevel and spur gears in differentials, final drives, and transmissions. It is suitable for use in heavy duty on and off-road truck and automotive differentials that don't require Limited Slip additive.



HEAVY DUTY GEAR OIL 80W-90

- For manual transmissions
- Offers smooth running gear operation under various temperature conditions
- Protects against rust and corrosion
- Increased wear protection over a wide temperature range


PERFORMANCE LEVELS

API GL-4

Product Description	1L	5L	20L	60L	208L
Valvoline Heavy Duty Gear Oil 80W-90	854745	-	-	-	866957

*Please refer to contact details on the back page for more information.

MULTI PURPOSE GREASE / LUBRICANT SPRAY

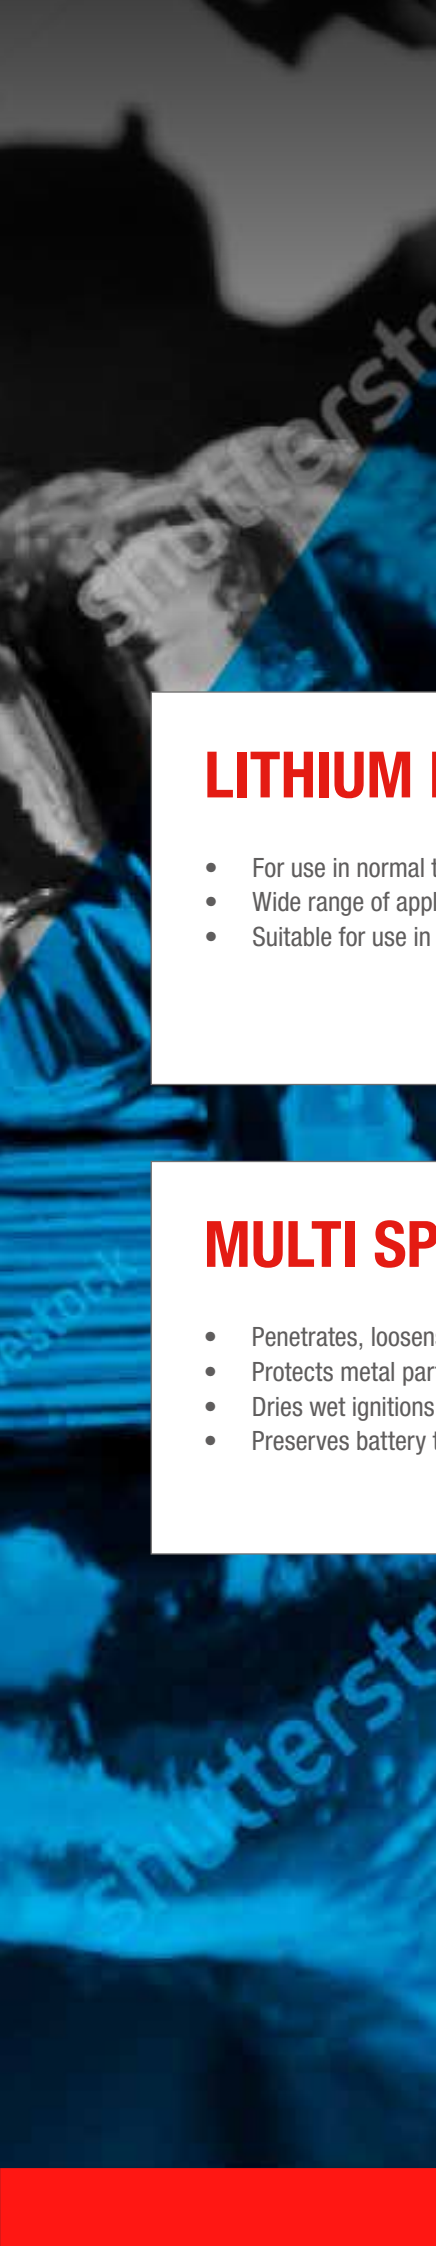

LITHIUM EP2

- For use in normal temperature conditions
- Wide range of application
- Suitable for use in construction, agricultural, marine, industrial and automotive applications

MULTI SPRAY

- Penetrates, loosens, and lubricates
- Protects metal parts against corrosion
- Dries wet ignitions
- Preserves battery terminals from corrosion

LITHIUM EP2



MULTI-PURPOSE GREASES

High quality multi-purpose lithium EP grease developed for lubrication of automotive, construction and industrial equipment working under normal temperature conditions.

Valvoline Multi-purpose Lithium EP 2 is a Lithium thickened lubricating grease formulated with mineral base oil and improved with extreme pressure – EP – additives to lubricate and protect even in heavy loaded circumstances. Mechanically very stable and easily pumpable due to its smooth consistency.



MULTIPURPOSE LITHIUM EP2

- Suitable for use in normal temperature conditions and for a wide range of plain and rolling bearings, where an extreme pressure grease is needed

Suitable for many applications:

- Construction, industrial and automotive

PERFORMANCE LEVELS

DIN 51502: KP2K-30, ISO 12924: L-XC(F)CHB2

Product Description	400ML	18KG	50KG	180KG
Multipurpose Lithium EP2	-	882957	-	882956

*Please refer to contact details on the back page for more information.

MULTI SPRAY



LUBRICANT SPRAY

Valvoline Multi Spray is a blend of fast-acting super-penetrating solvents that evaporate, leaving a thin transparent protective film, rapidly loosens corroded fastenings and penetrates quickly into cracks, crevices and threads, freeing bolts, nuts and other fasteners. Annoying squeaks are silenced by friction-reducing lubricants. Cleans and protects all metals from rust and corrosion.

Use to loosen, dry, protect, lubricate and clean; bolts, sewing machines, lock mechanisms, distributors, spark plugs, tools, pipe threads, typewriters, hinges, guns, fishing reels, farm and garden equipment, rollers, wheels, nuts, boat parts, chains, clamps, appliances, chrome, zip fasteners, clocks, etc.

- Penetrates, loosens, lubricates, and protects metal parts from rust and corrosion
- Dries wet ignitions
- Preserves battery terminals from corrosion



MULTI SPRAY

- Use Multi Spray to loosen, dry, protect, lubricate and clean: bolts, sewing machines, lock mechanisms, distributors, spark plugs, tools, pipe threads, typewriters, hinges, guns, fishing reels, farm and garden equipment, rollers, wheels, nuts, boat parts, chains, clamps, appliances, chrome, zip fasteners, clocks, curtain rails and many, many more uses.
- Also can be used to lubricate the hinges and locks of garage doors, keeps lawn mowers in good condition and weather vanes point in the right direction.
- Multi Spray cleans and protects all metals from rust and corrosion. Removes tar, oil, adhesives and grime are easily from most surfaces.

Product Description	400ML	18KG	50KG	180KG
Multi Spray	VE54330	-	-	-

*Please refer to contact details on the back page for more information.

COOLANTS / ANTIFREEZE





MAXLIFE COOLANT

- Formulated for both new and higher mileage vehicles
- Prevents scaling and system deposits
- Protects seals, gaskets and aluminum
- Long-life formula (five years)

MAXLIFE COOLANT



ANTIFREEZE / COOLANT SOLUTIONS

Valvoline antifreeze coolant products are scientifically formulated to keep your vehicle running under extreme temperatures. Deposit buildup can block the flow of antifreeze coolant to your engine, leading to overheating, freezing, rust, corrosion and inconvenient breakdown.



MAXLIFE COOLANT AF 50/50 RTU

For all passenger car applications

- For both new and higher mileage vehicles
- Extra additives to prevent scaling and system deposits
- Protects seals, gaskets and aluminum
- Lubricates seals and hoses to prolong life
- Long-life formula (five years)

PERFORMANCE LEVELS / APPROVALS

ASTM D-3306 (D-4656), ASTM D-4985, BMW N600.69.0, BS 6580, 1992, Citroen (PSA B 71 5110), Cuna NC956-16, Detroit Diesel, Deutz MWM, Ford WSS M97 B44-D, GM B 040 0240, Isuzu, Jaguar, Leyland, DAF, MAN 324 Si-OAT, MAN 324 type NF, MAN B&W, MB-325.0, 2, 3, 5, 6, MTU, NATO S-759, O-Norm V5123, Opel 6277M, Peugeot (PSA B 71 5110), Renault RVI, Saab (6901 599), Steyr, SAE J1034, J814C, J1941, Scania, Volvo VCS, Volvo, Mack



MAXLIFE COOLANT AF CONCENTRATE

For all passenger car applications

- For both new and higher mileage vehicles
- Extra additives to prevent scaling and system deposits
- Protects seals, gaskets and aluminum
- Lubricates seals and hoses to prolong life
- Long-life formula (five years)

PERFORMANCE LEVELS / APPROVALS

ASTM D-3306 (D-4656), ASTM D-4985, BMW N600.69.0, BS 6580, 1992, Citroen (PSA B 71 5110), Cuna NC956-16, Detroit Diesel, Deutz MWM, Ford WSS M97 B44-D, GM B 040 0240, Isuzu, Jaguar, Leyland, DAF, MAN 324 Si-OAT, MAN 324 type NF, MAN B&W, MB-325.0, 2, 3, 5, 6, MTU, NATO S-759, O-Norm V5123, Opel 6277M, Peugeot (PSA B 71 5110), Renault RVI, Saab (6901 599), Steyr, SAE J1034, J814C, J1941, Scania, Volvo VCS, Volvo, Mack

Product Description	1L	4L	5L	20L	208L
MaxLife Coolant AF 50/50 RTU	808510	-	-	808508	-
MaxLife Coolant AF Concentrate	808503	-	808502	808501	808449

*Please refer to contact details on the back page for more information.

BRAKE & CLUTCH FLUID



BRAKE & CLUTCH FLUID

- High-performance non-mineral oil
- High boiling point
- Specifically developed for hydraulic brake systems

BRAKE & CLUTCH FLUID



SAFETY FIRST WITH HIGH-QUALITY FLUIDS

High-quality brake fluid is essential to ensure effective stopping power. Most vehicle manufacturers recommend changing brake fluids every two years to optimize braking performance and protect system components. Top-quality Valvoline brake fluids are available for all driving conditions and brake systems, including disc, drum and anti-skid (ABS) applications. Choosing Valvoline brake fluids is your guarantee of advanced performance and system protection.

BRAKE & CLUTCH FLUIDS HIGH-QUALITY FLUIDS

Valvoline Brake & Clutch Fluids are high-quality, non-mineral fluids based on glycol ethers, and are formulated specifically for hydraulic brake systems. The high boiling points of all products mean that they are safe for use within the brake system and can be mixed with other brake fluids with similar specifications. The hygroscopic properties of Valvoline Brake and Clutch Fluids absorb water that slowly lowers the boiling point. It is recommended that brake and clutch fluids are refreshed every two years.



BRAKE & CLUTCH FLUID DOT 4

- High-performance non-mineral brake fluid.
- Based on glycol ethers and specifically developed for hydraulic brake systems.


PERFORMANCE LEVELS / APPROVALS

SAE J.1704 FMVSS 116 DOT 4 ISO 4925 Class 4

Product Description	500ML	1L	4L	5L	20L	208L
Brake & Clutch Fluid DOT 4	841592	-	-	841592	-	-

*Please refer to contact details on the back page for more information.

SOLVENTS

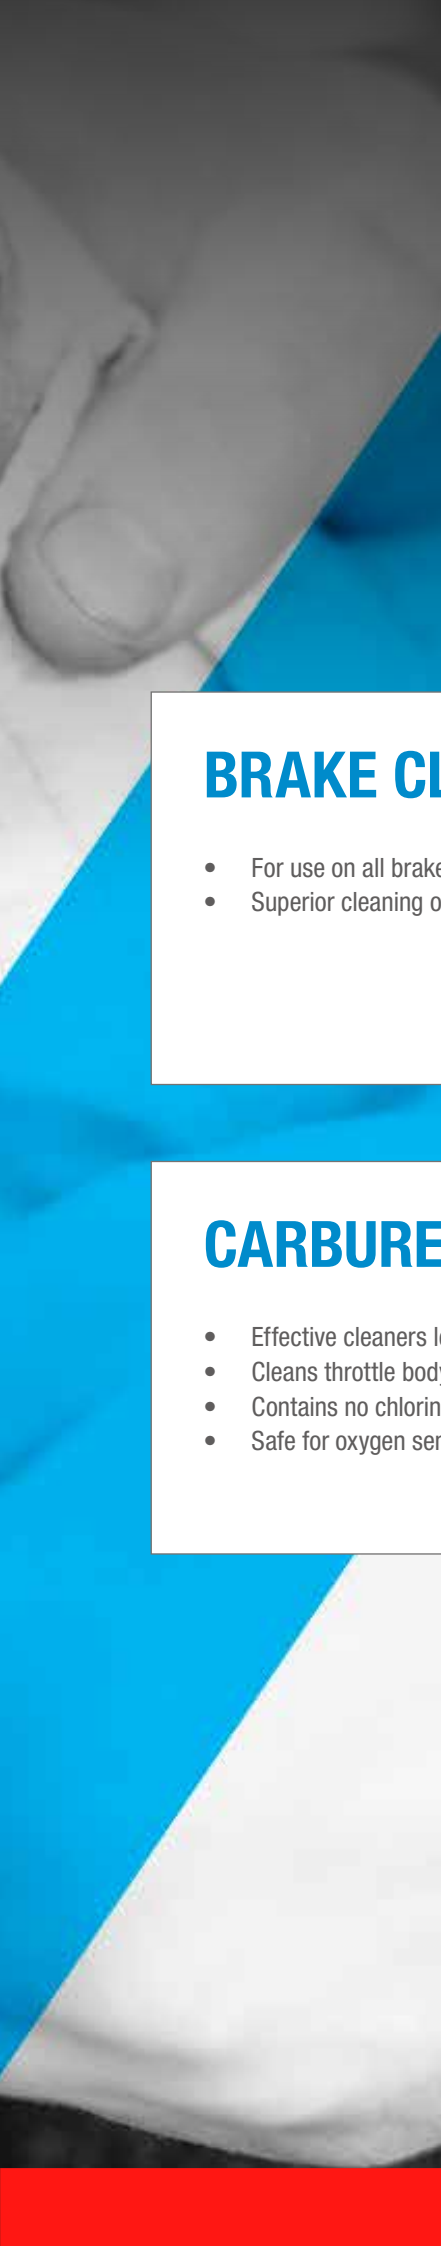

BRAKE CLEANER

- For use on all brake systems of passenger cars, vans, trucks, buses, trailers
- Superior cleaning of electric terminals, tools, and workshop equipment

CARBURETOR CLEANER

- Effective cleaners leave no deposits
- Cleans throttle body, carburetors and choke
- Contains no chlorinated solvents
- Safe for oxygen sensors and catalytic converters

BRAKE CLEANER



BRAKE CLEANER IS A HIGH-QUALITY PRODUCT THAT INSTANTLY CLEANS VARIOUS AUTOMOTIVE PARTS

Brake Cleaner is a powerful aerosol with assisted cleaning agent that removes all dirt and dust from car brakes and electric starter motors instantly, leaving no residue behind. It is also an all-round degreaser and may be used on clutch discs and pressure plates, electric motors, switches and contacts.



BRAKE CLEANER

- For use on all brake systems of passenger cars, vans, trucks, buses, trailers etc. Also suitable for industrial vehicles.
- Instantly cleans brake pads, pressure plates, brake linings, rotors, disc pads and drums.
- Superior cleaning of electric terminals, tools, and workshop equipment. Also flushes oil, dirt and carbon from electric motors.

Product Description	500ML	1L	4L	5L	20L	208L
Brake CLeaner	745935	-	-	-	-	-

*Please refer to contact details on the back page for more information.

CARBURETOR CLEANER



CARBURETOR CLEANER IS A BLEND OF SELECTED SOLVENTS, CAREFULLY FORMULATED TO MAXIMIZE CLEANING POWER

Carburetor Cleaner is safe for oxygen sensors, catalytic converters and electronically-controlled carburetors. Meets current VOC regulations and contains no chlorinated solvents.



CARBURETOR CLEANER

- Dirt or gummy build-up on throttle plates and linkages can result in rough idle, engine "stumbles" or stalls and loss of acceleration.
- Carburetor Cleaner is a blend of selected solvents, carefully formulated to maximize cleaning power.
- Stubborn deposits are dissolved quickly and safely. Cleans carburetors, chokes, PCV valves, automatic choke, manifold heat controls and throttle linkages. Also removes throttle body deposits.

PERFORMANCE LEVELS / APPROVALS

SAE J.1704 FMVSS 116 DOT 4 ISO 4925 Class 4

Product Description	500ML	1L	4L	5L	20L	208L
Carburetor Cleaner	-	-	-	872277	-	-

*Please refer to contact details on the back page for more information.

PRODUCT OVERVIEW

SYNPOWER

Product Description	1L	5L	20L	208L
SynPower FE 5W-30	-	872552	-	-
SynPower 5W-40	872380	872382	-	-

ALL-FLEET

Product Description	1L	4L	5L	208L
All-Climate 15W-40	-	-	882948	-
All-Climate SL 20W-50	882955	-	882953	821257
All-Climate SG 20W-50	-	882445	-	-
All-Climate 5W-30	881980	-	881981	872285
All-Climate 5W-40	881983	-	881984	872289
All-Climate Extra 10W-40	-	-	882949	834147
All-Climate 10W-40	-	-	882949	-
All-Climate Diesel C3 5W-40	-	-	872277	-
All-Climate High-Mileage	884834	-	883582	-

ALL-CLIMATE

Product Description	1L	5L	20L	208L
All-Fleet 40	-	882435	-	-
All-Fleet Extra 15W-40	-	854743	-	-
All-Fleet Plus CH-4 15W-40	-	882181	-	-

CHAMP 4T

Product Description	1L	5L	20L	208L
Champ 4T 20W-50	882446	-	-	-

ATF

Product Description	1L	5L	20L	208L
ATF	866885	-	866886	866888
ATF DEX/MERC	866913	-	-	866911

HEAVY DUTY GEAR OIL

Product Description	1L	5L	20L	208L
Valvoline Heavy Duty Gear Oil 80W-90	854745	-	-	866957

MULTI-PURPOSE GREASES

Product Description	400ML	18KG	50KG	180KG
Multipurpose Lithium EP2	-	882957	-	882956

MULTI SPRAY

Product Description	400ML	18KG	50KG	180KG
Multi Spray	VE54330	-	-	-

*Please refer to contact details on the back page for more information.

MAXLIFE COOLANT

Product Description	1L	4L	5L	20L	208L
MaxLife Coolant AF 50/50 RTU	808510	-	-	808508	-
MaxLife Coolant AF Concentrate	808503	-	808502	808501	808449

BRAKE & CLUTCH FLUID

Product Description	500ML	1L	4L	5L	20L
Brake & Clutch Fluid DOT 4	841592	-	-	841592	-

BRAKE CLEANER

Product Description	500ML	1L	4L	5L	20L
Brake CLeaner	745935	-	-	-	-

CARBURETOR CLEANER

Product Description	500ML	1L	4L	5L	20L
Carburetor Cleaner	-	-	-	872277	-

*Please refer to contact details on the back page for more information.



Valvoline South Africa
P O Box 7750 | Centurion | Johannesburg
Email: info.mea@valvoline.com
www.valvolineeurope.com

© 2018 Valvoline

The information presented in this brochure is believed to be accurate and reliable. However, because the conditions and methods of use of the products are beyond Valvoline's control, Valvoline cannot assume any responsibility for performance or results obtained through the use of the products herein described. It shall be the responsibility of the user to determine the suitability of any of the products mentioned for the user's specific use. Valvoline's sole warranty is that the products shall at the time of delivery conform to the technical specifications in effect at the time of shipment. Any warranties that may be applicable pursuant to any laws or regulations, including any warranties of fitness for a particular purpose or merchantability, are expressly excluded. Unless expressly agreed otherwise, Valvoline's liability with regard to non-conforming products will be limited to the replacement value. Statements or suggestions concerning the possible use of the products described herein are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. Although every care is taken to ensure accuracy and completeness in compiling these data, no liability can be accepted for damage or loss caused by any errors or omissions in the information given.